

HVAC

DriPak® 2000

Product Overview


- Meltblown synthetic media provides lower initial resistance versus fiberglass
- Media is high-loft, layered, non-shedding, and water resistant
- Ultrasonically-welded pockets guarantee complete inflation without crowding or leakage
- Reinforced pocket supports prevent flexing or bucking in turbulent conditions
- Available with antimicrobial



Specifications

Efficiency	MERV 15, MERV 14, MERV 12
Available Depths	12", 15", 18", 21", 22", 26", 30", 36"
Media Type	Synthetic
Frame Material	Galvanized Steel
Antimicrobial Available	Yes
Max Operating Temperature	200°F (93°C)

Initial Resistance vs. Filter Face Velocity

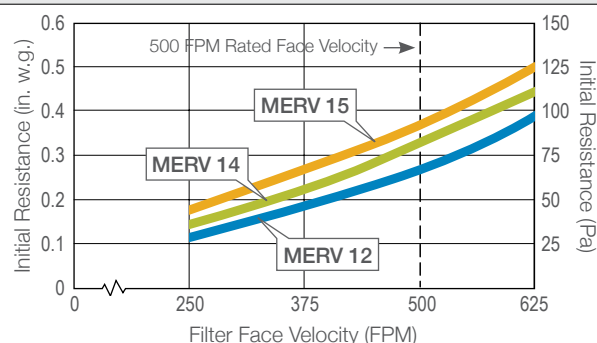

MERV 15, 14 & 12 based on 24" x 24" x 30" – 8 pocket filter.

Product Information

Part Number	Nominal Size Inches (W x H x D)	Number of Pockets	Gross Media Area (sq. ft.)	Rated Airflow Capacity (SCFM)	Std. Pkg. Qty. Per Box	Shipping Wt. Lbs. per Box (± 7%)	Cubic Ft.
MERV 15							
709-110-300	24 x 24 x 30	10	107	2,000	4	38.0	9.4
709-124-300	12 x 24 x 30	4	43	1,000	4	18.0	3.1
709-118-210	24 x 24 x 21	8	60	2,000	4	32.0	4.5
709-124-210	12 x 24 x 21	4	30	1,000	4	18.0	2.9
709-116-210	24 x 24 x 21	6	45	1,500	4	22.0	5.3
709-123-210	12 x 24 x 21	3	22	750	4	13.0	2.1
MERV 14							
708-110-300	24 x 24 x 30	10	107	2,000	4	38.0	9.4
708-124-300	12 x 24 x 30	4	43	1,000	4	18.0	3.1
708-118-210	24 x 24 x 21	8	60	2,000	4	27.0	5.8
708-124-210	12 x 24 x 21	4	30	1,000	4	15.0	2.9
708-116-210	24 x 24 x 21	6	45	1,500	4	22.0	5.3
708-123-210	12 x 24 x 21	3	22	750	4	13.0	2.1
MERV 12							
706-110-300	24 x 24 x 30	10	107	2,000	4	38.0	9.4
706-124-300	12 x 24 x 30	4	43	1,000	4	18.0	3.1
706-118-210	24 x 24 x 21	8	60	2,000	4	27.0	4.5
706-124-210	12 x 24 x 21	4	30	1,000	4	15.0	2.9
706-116-210	24 x 24 x 21	6	45	1,500	4	22.0	5.3
706-123-210	12 x 24 x 21	3	22	750	4	13.0	2.1

Additional sizes, pocket quantities, and depths are available upon request.

HVAC

DriPak®

Product Overview


- Patented pocket design lengthens filter life
- Low resistance and high dust holding capacity
- Engineered for performance reliability
- Double-reinforced corrosion resistant steel header
- Aerodynamically balanced pockets significantly extend filter life



Specifications

Efficiency	MERV 15, MERV 13
Available Depths	12", 15", 18", 21", 22", 26", 30", 36"
Media Type	Fiberglass
Frame Material	Galvanized Steel
Special Size Available	No
Antimicrobial Available	No
Header Style	Single
Max Operating Temperature	150°F (66°C)

Initial Resistance vs. Filter Face Velocity

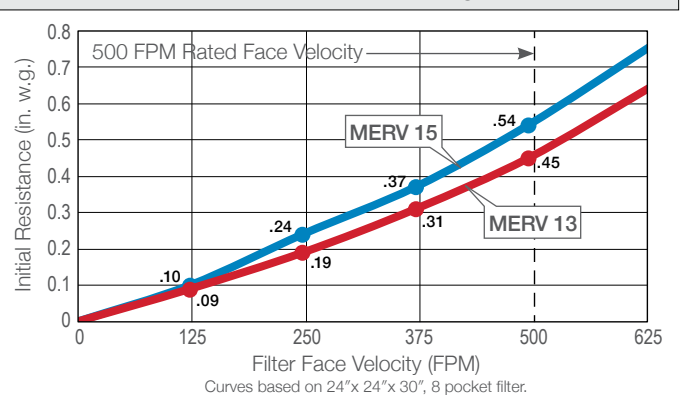

Product Information

Part Number	Nominal Size Inches (W x H x D)	Number of Pockets	Gross Media Area (sq. ft.)	Rated Airflow Capacity (SCFM)	Std. Pkg. Qty. Per Box	Shipping Wt. Lbs. per Box (± 7%)	Cubic Ft.
MERV 15							
729-110-300	24 x 24 x 30	10	105	2,000	4	28.0	9.4
729-124-300	12 x 24 x 30	4	43	1,000	4	15.0	3.1
729-136-300	20 x 24 x 30	6	64	1,675	4	20.0	6.2
729-146-300	20 x 20 x 30	6	55	1,400	4	16.0	5.5
729-118-210	24 x 24 x 21	8	60	2,000	4	22.0	6.1
729-124-210	12 x 24 x 21	4	30	1,000	4	14.0	2.9
729-116-210	24 x 24 x 21	6	46	1,500	4	18.0	5.6
729-123-210	12 x 24 x 21	3	23	750	4	11.0	2.9
MERV 13							
728-110-300	24 x 24 x 30	10	105	2,000	4	30.0	9.4
728-124-300	12 x 24 x 30	4	43	1,000	4	18.0	3.1
728-136-300	20 x 24 x 30	6	64	1,675	4	21.0	5.9
728-146-300	20 x 20 x 30	6	55	1,400	4	18.0	5.5
728-118-210	24 x 24 x 21	8	60	2,000	4	23.0	6.1
728-124-210	12 x 24 x 21	4	30	1,000	4	15.0	2.9
728-116-210	24 x 24 x 21	6	46	1,500	4	19.0	5.6
728-123-210	12 x 24 x 21	3	23	750	4	12.0	2.9

Additional sizes, pocket quantities, and depths are available upon request.

HVAC

AmerSeal® Cube Filters

Product Overview


- Self-sealing design prevents dirty air bypass
- High dust holding capacity for long service life
- Fast installation; no clips or latches required
- Heat-sealed construction
- Tackified, progressive density media
- Synthetic 3-ply media is 100% moisture resistant
- 9-gauge galvanized wire frame
- MERV 8
- Single header construction also available
- UL Classified



Specifications

Efficiency	MERV 8
Filter Depth	10", 15", 20"
Media Type	Synthetic
Special Size Available	No
Header Style	Self-Sealing or Single
Max Operating Temperature	175°F (79°C)

Initial Resistance vs. Filter Face Velocity

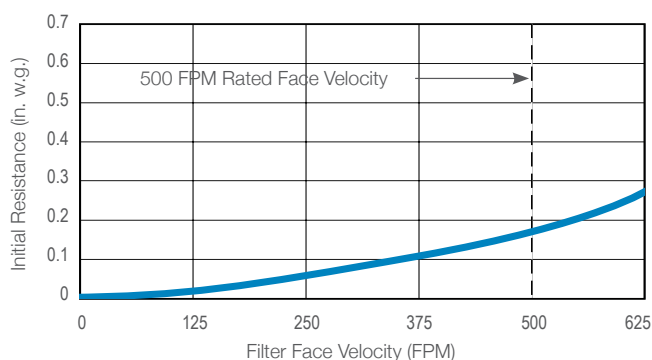

Product Information

Part Number	Nominal Size Inches (W x H x D)	Rated Airflow Capacity (SCFM)	Std. Pkg. Qty. Per Box	Shipping Wt. Lbs. per Box (± 7%)	Cubic Ft.
521-500-304	16 x 20 x 10	875	4	8	2.2
521-600-304	16 x 25 x 10	1,100	4	8	3.3
521-700-304	20 x 20 x 10	1,100	4	25*	3.3
521-782-304	20 x 24 x 10	1,325	4	25*	4.7
521-800-304	20 x 25 x 10	1,375	4	25*	4.7
521-863-304	24 x 24 x 10	1,600	4	25*	4.9
521-500-305	16 x 20 x 15	1,100	4	10	2.5
521-600-305	16 x 25 x 15	1,375	4	10	3.3
521-700-305	20 x 20 x 15	1,375	4	25*	3.3
521-782-305	20 x 24 x 15	1,650	4	25*	4.7
521-800-305	20 x 25 x 15	1,725	4	25*	4.7
521-863-305	24 x 24 x 15	2,000	4	25*	4.9
521-500-306	16 x 20 x 20	1,375	3	13	2.5
521-600-306	16 x 25 x 20	1,725	3	13	3.3
521-700-306	20 x 20 x 20	1,725	3	25*	3.3
521-782-306	20 x 24 x 20	2,075	3	25*	4.7
521-800-306	20 x 25 x 20	2,150	3	25*	8.3
521-863-306	24 x 24 x 20	2,500	3	25*	4.9

Product information listed above is for the two-pocket no header configuration. Single pocket, single header, and additional sizes available upon request.

*Carton may be oversized for Ground Shipping.