

HVAC

FrontLine™ Gold Media

Product Overview

- Heavy-duty, industrial grade fiberglass media
- Extra high fiber content
- Heavy application of Viscosine™ adhesive
- Very high compression strength



Specifications

Efficiency	75%–90% Arrestance
Depth	1", 2"
Media Type	Fiberglass
Special Size Available	Yes
Antimicrobial Available	No
Max Operating Temperature	175°F (79°C)
Air Filtration Certification	UL 900, ULC-S111

Product Information

Part Number	Nominal Size (W x H x D)	Std. Pkg. Qty.	Shipping Wt. Lbs. per Box (± 10%)	Cubic Ft.
1" Pads				
629-151-319	12" x 24" x 1"	50	7.0	4.9
629-151-500	16" x 20" x 1"	50	7.4	2.1
629-151-600	16" x 25" x 1"	50	9.3	2.6
629-151-700	20" x 20" x 1"	50	9.3	2.6
629-151-800	20" x 25" x 1"	50	11.3	3.3
629-151-863	24" x 24" x 1"	50	12.7	3.9
1" Rolls				
630-151-080	8" x 85' x 1"	2	6.0	2.1
630-151-120	12" x 85' x 1"	2	8.9	2.9
630-151-240	24" x 85' x 1"	2	17.9	6.4
630-151-250	25" x 85' x 1"	2	18.6	6.4
630-151-360	36" x 85' x 1"	2	26.8	8.8
630-151-480	48" x 85' x 1"	2	35.7	11.4
630-151-600	60" x 85' x 1"	1	24.0	14.0
2" Pads				
629-252-328	12" x 24" x 2"	40	9.5	4.9
629-252-608	16" x 20" x 2"	30	6.8	2.1
629-252-611	16" x 25" x 2"	30	8.5	2.6
629-252-516	18" x 24" x 2"	40	11.0	7.0
629-252-805	20" x 20" x 2"	30	8.5	2.6
629-252-517	20" x 24" x 2"	30	10.0	3.3
629-252-813	20" x 25" x 2"	30	10.3	3.3
629-252-858	24" x 24" x 2"	30	11.6	3.9
2" Rolls				
630-252-120	12" x 85' x 2"	2	13.3	2.9
630-252-240	24" x 85' x 2"	2	26.2	6.4
630-252-250	25" x 85' x 2"	2	27.3	6.4
630-252-360	36" x 85' x 2"	2	39.3	8.8
630-252-480	48" x 85' x 2"	2	52.4	11.4
630-252-600	60" x 85' x 2"	1	34.0	7.3

Additional sizes available upon request.

HVAC

PolyKlean™ Blue Media

Product Overview

- Medium to heavy-duty applications
- Durable 100% polyester fibers
- Pressure sensitive dry tack adhesive on air leaving side
- Non-toxic, non-allergenic
- Fully incinerable
- Easy to handle
- ½", 1", and 2" thicknesses



Specifications

Filter Depth	½", 1", 2"
Media Type	Synthetic
Special Size Available	Yes
Antimicrobial Available	No
Max Operating Temperature	175°F (79°C)
Air Filtration Certification	UL 900

Product Information

Part Number	Nominal Size (W x H x D)	Std. Pkg. Qty.	Shipping Wt. Lbs. per Box (± 10%)	Cubic Ft.
½" Pads				
358-015-319	12" x 24" x ½"	60	6.5	4.0
358-015-700	20" x 20" x ½"	60	9.1	5.6
358-015-782	20" x 24" x ½"	60	11.0	6.7
358-015-863	24" x 24" x ½"	60	13.0	7.7
1" Pads				
358-011-319	12" x 24" x 1"	40	6.3	4.0
358-011-700	20" x 20" x 1"	40	7.9	5.4
358-011-782	20" x 24" x 1"	40	10.0	6.7
358-011-863	24" x 24" x 1"	40	11.0	7.7
2" Pads				
358-012-319	12" x 24" x 2"	20	5.3	4.0
358-012-700	20" x 20" x 2"	20	6.6	5.4
358-012-782	20" x 24" x 2"	20	8.0	6.7
358-012-863	24" x 24" x 2"	20	9.0	8.1
½" Rolls				
357-015-120	12" x 135'	3	11.1	25.5
357-015-240	24" x 135'	2	14.9	34.0
357-015-360	36" x 135'	1	11.8	25.5
357-015-480	48" x 135'	1	14.9	34.0
357-015-600	60" x 135'	1	18.6	42.5
1" Rolls				
357-011-120	12" x 90'	3	11.1	25.5
357-011-240	24" x 90'	2	14.9	34.0
357-011-360	36" x 90'	1	10.8	25.5
357-011-480	48" x 90'	1	14.4	34.0
357-011-600	60" x 90'	1	18.0	42.5
2" Rolls				
357-012-120	12" x 75'	3	12.6	33.3
357-012-240	24" x 75'	2	16.8	44.4
357-012-360	36" x 75'	1	10.4	33.3
357-012-480	48" x 75'	1	13.8	44.4
357-012-600	60" x 75'	1	17.3	55.6

Additional sizes available upon request.

HVAC

PolyKlean™ White Media

Product Overview

- Light to medium-duty applications
- Durable 100% polyester fibers
- Dry media—no adhesive
- Non-toxic, non-allergenic
- Fully incinerable
- Easy to handle
- ½", 1", and 2" thicknesses



Specifications

Filter Depth	½", 1", 2"
Media Type	Synthetic
Special Size Available	Yes
Antimicrobial Available	No
Max Operating Temperature	175°F (79°C)
Air Filtration Certification	UL 900

Product Information

Part Number	Nominal Size (W x H x D)	Std. Pkg. Qty.	Shipping Wt. Lbs. per Box (± 10%)	Cubic Ft.
½" Pads				
358-035-319	12" x 24" x ½"	60	6.0	4.0
358-035-700	20" x 20" x ½"	60	8.7	5.6
358-035-782	20" x 24" x ½"	60	10.0	6.7
358-035-863	24" x 24" x ½"	60	12.0	8.0
1" Pads				
358-031-319	12" x 24" x 1"	40	5.3	4.2
358-031-700	20" x 20" x 1"	40	7.5	5.4
358-031-782	20" x 24" x 1"	40	9.5	6.7
358-031-863	24" x 24" x 1"	40	10.5	8.1
2" Pads				
358-032-319	12" x 24" x 2"	20	4.0	4.0
358-032-700	20" x 20" x 2"	20	5.5	5.6
358-032-782	20" x 24" x 2"	20	7.0	7.0
358-032-863	24" x 24" x 2"	20	8.0	8.0
½" Rolls				
357-035-120	12" x 135'	3	11.2	25.5
357-035-240	24" x 135'	2	15.0	17.0
357-035-360	36" x 135'	1	11.2	25.5
357-035-480	48" x 135'	1	15.0	34.0
357-035-600	60" x 135'	1	18.7	42.5
1" Rolls				
357-031-120	12" x 90'	3	10.5	25.5
357-031-240	24" x 90'	2	14.0	34.0
357-031-360	36" x 90'	1	10.5	25.5
357-031-480	48" x 90'	1	14.0	34.0
357-031-600	60" x 90'	1	17.5	42.5
2" Rolls				
357-032-120	12" x 75'	3	14.1	33.3
357-032-240	24" x 75'	2	18.8	44.4
357-032-360	36" x 75'	1	14.1	33.3
357-032-480	48" x 75'	1	18.8	44.4
357-032-600	60" x 75'	1	23.4	55.6

Additional sizes available upon request.

HVAC

Roll-O-Mat® Gold with Scrim

Product Overview

- Premium quality 2" thick, continuous filament fiberglass media
- Progressive density media to prevent face-loading
- Replacements available for all common autoroll types and sizes
- Scrim-backed to prevent bypass leakage
- Heavy application of Viscosine™ adhesive for superior dust retention
- 65' long rolls



Specifications

Efficiency	80%–85% Arrestance
Filter Depth	2"
Media Type	Fiberglass
Antimicrobial Available	No
Air Filtration Certification	UL 900, ULC-S111

Product Information

Part Number	Filter Size	Media Core Dimensions (Length x I.D.)	Nominal Roll Size (Media Only)	Std. Pkg. Qty.	Shipping Wt. Lbs. per Box (± 10%)	Cubic Ft.
800-205-100	21	24½" x 1⅛"	22¼" x 65'	1	16.0	2.3
800-222-100	22	22¼" x 1⅛"	24" x 65'	1	16.0	2.3
800-248-100	25	24⅞" x 1⅛"	26⅝" x 65'	1	16.0	2.7
800-318-100	32	31⅞" x 1⅛"	34" x 65'	1	20.7	3.3
800-327-100	33 or 3'	32¾" x 1⅛"	34¾" x 65'	1	22.7	3.3
800-385-100	39	38½" x 1⅛"	40⅝" x 65'	1	26.0	4.0
800-398-100	40	39⅞" x 1⅛"	42⅛" x 65'	1	26.9	4.0
800-447-100	45 or 4'	44¾" x 1⅛"	47¼" x 65'	1	27.6	4.5
800-567-100	57 or 5'	56¾" x 1⅛"	59¼" x 65'	1	33.2	5.6
800-687-100	69 or 6'	68¾" x 1⅛"	71½" x 65'	1	37.4	6.7

Replacement rolls for AAF Flanders Roll-O-Mat® units shown above. Replacement rolls for other manufacturer's equipment and additional sizes available upon request.

HVAC

Roll-O-Mat® Green

Product Overview

- Replacements available for all common autoroll types and sizes
- Tackified with Viscosine™ adhesive to retain dust
- Scrim-backed to prevent bypass leakage
- Available in ½" and 1" thicknesses
- 100% polyester fibers
- 65' long rolls



Specifications

Efficiency	70%–75% Arrestance
Filter Depth	½", 1"
Media Type	Synthetic
Antimicrobial Available	No
Air Filtration Certification	UL 900, ULC-S111

Product Information

Part Number	Filter Size	Media Core Dimensions (Length x I.D.)	Nominal Roll Size (Media Only)	Std. Pkg. Qty.	Shipping Wt. Lbs. per Box (± 10%)	Cubic Ft.
1"						
870-222-300	22	22¼" x 1⅛"	22½" x 65'	1	13.0	2.3
870-248-300	25	24⅞" x 1⅛"	25¼" x 65'	1	13.7	2.7
870-318-300	32	31⅞" x 1⅛"	33" x 65'	1	15.6	3.3
870-327-300	33 or 3'	32¾" x 1⅛"	33" x 65'	1	15.8	3.3
870-385-300	39	38½" x 1⅛"	38¾" x 65'	1	17.4	4.0
870-398-300	40	39⅞" x 1⅛"	40¼" x 65'	1	18.0	4.0
870-447-300	45 or 4'	44¾" x 1⅛"	45" x 65'	1	20.1	4.5
870-567-300	57 or 5'	56¾" x 1⅛"	57" x 65'	1	23.3	5.6
870-687-300	69 or 6'	68¾" x 1⅛"	69" x 65'	1	26.6	6.7
½"						
860-205-300	21	20½" x 1⅛"	20¾" x 65'	1	10.9	2.3
860-222-300	22	22¼" x 1⅛"	22½" x 65'	1	11.3	2.3
860-248-300	25	24⅞" x 1⅛"	25¼" x 65'	1	11.8	2.7
860-318-300	32	31⅞" x 1⅛"	33" x 65'	1	13.2	3.3
860-327-300	33 or 3'	32¾" x 1⅛"	33" x 65'	1	13.4	3.3
860-385-300	39	38½" x 1⅛"	38¾" x 65'	1	14.5	4.0
860-398-300	40	39⅞" x 1⅛"	40¼" x 65'	1	15.8	4.5
860-447-300	45 or 4'	44¾" x 1⅛"	45" x 65'	1	16.7	4.5
860-567-300	57 or 5'	56¾" x 1⅛"	57" x 65'	1	19.1	5.6
860-687-300	69 or 6'	68¾" x 1⅛"	69" x 65'	1	21.4	6.7

Replacement rolls for AAF Flanders Roll-O-Mat® units shown above. Replacement rolls for other manufacturer's equipment and additional sizes available upon request.

HVAC

AmerKleen™ M80

Product Overview


- Glass fiber pad with progressive density
- Strong resilient design
- Impregnated with gel-like adhesive
- High Dust Holding Capacity (DHC)
- Disposable



Specifications

Efficiency	85%–90% Arrestance
Filter Depth	4"
Media Type	Fiberglass
Special Size Available	Yes
Antimicrobial Available	No
Max Operating Temperature	175° (79°C)
Air Filtration Certification	UL 900

Initial Resistance vs. Filter Face Velocity

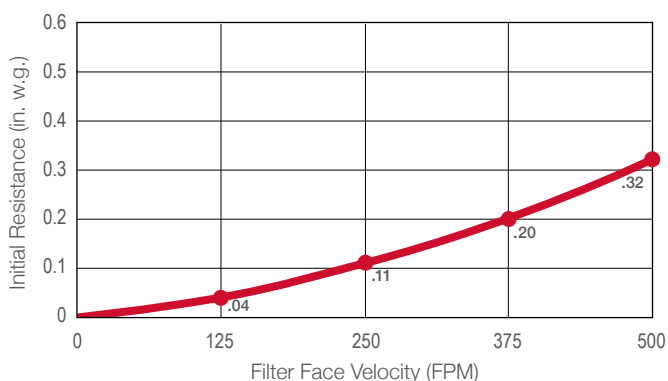

Product Information

Part Number	Nominal Size Inches (W x H x D)	Actual Size Inches (W x H x D)	Std. Pkg. Qty.	Shipping Wt. Lbs. per Box (± 10%)	Cubic Ft.
159-608-880	16 x 20 x 4	16¼ x 20¼ x 4	25	14.9	7.0
159-611-880	16 x 25 x 4	16¼ x 25¼ x 4	25	16.4	7.0
159-805-880	20 x 20 x 4	20¼ x 20¼ x 4	25	16.1	5.6
159-813-880	20 x 25 x 4	20¼ x 25¼ x 4	25	19.6	7.0
159-858-880	24 x 24 x 4	24¼ x 24¼ x 4	20	18.1	6.7

Additional sizes available upon request.

HVAC

AG-28 Paint Arrestor Media

Product Overview


- Effectively removes paint overspray solids of all types – lacquer, air dry, or baked enamel
- Open weave design allows paint to collect throughout the depth of the pad
- Skin backing prevents paint from penetrating through the media
- 99.06% paint removal efficiency
- 4.4 lb. paint-holding capacity
- High compression strength prevents sagging or collapsing
- Protects exhaust ducts, fans, and motors from paint buildup
- Clean exhaust air is discharged to the atmosphere
- Easy installation, removal, and space-saving packing for an overall reduction in operating costs



Specifications

Filter Depth	2"
Media Type	Fiberglass
Special Size Available	Yes
Antimicrobial Available	No
Max Operating Temperature	200°F (93°C)
Air Filtration Certification	UL 900

Initial Resistance vs. Filter Face Velocity

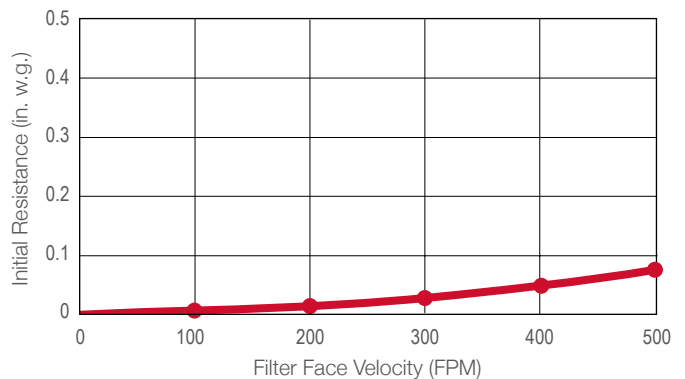

Product Information

Part Number	Nominal Size Inches (W x H x D)	Std. Pkg. Qty.	Shipping Wt. Lbs. per Box (± 10%)	Cubic Ft.
Pads				
150-512-628	16½ x 20½ x 2	60	8.5	2.1
150-601-628	16½ x 25½ x 2	60	10.2	2.6
150-806-628	20½ x 20½ x 2	60	8.4	2.6
150-807-628	20½ x 25½ x 2	60	10.1	3.3
150-863-628	24 x 24 x 2	60	11.3	3.9
Rolls				
150-814-228	20" x 85'	2	14.0	4.9
150-819-228	25" x 85'	2	18.0	6.4
150-894-228	30" x 85'	2	20.7	8.8
150-914-228	36" x 85'	2	28.6	8.8
150-942-228	40" x 85'	2	30.5	11.4
150-950-228	48" x 85'	2	32.2	11.4
150-963-128	60" x 85'	1	21.7	7.3

Additional sizes available upon request.

HVAC

SureFlow® Supreme Media

Product Overview

- Specifically designed for use as final filter in the supply air system of paint spray booths operating in the 50–150 FPM velocity range
- Forms a highly effective final protective barrier to prevent particles from entering through the makeup air system
- Non-migrating tackifier applied through entire media depth, along with woven scrim backing, prevents migration of fibers or particulate onto painted surfaces
- Serves as a baffle to ensure even air distribution
- Media available in pads, rolls, and ring panels




Specifications

Filter Depth	1"
Media Type	Synthetic
Special Size Available	Yes*
Antimicrobial Available	No
Max Operating Temperature	212°F (100°C)
Air Filtration Certification	UL 900

*Special sizes available in pads and rolls only.

Initial Resistance vs. Filter Face Velocity

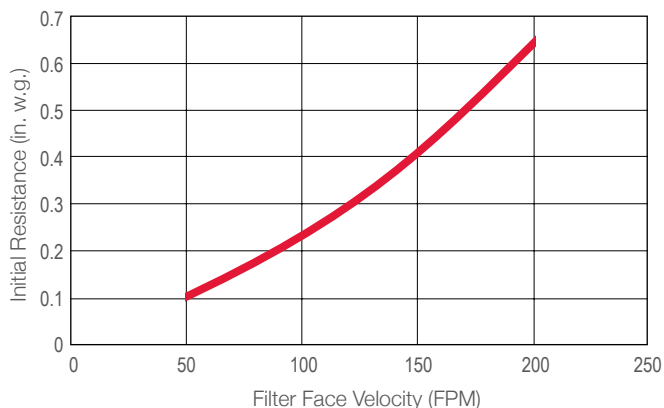

Product Information

Part Number	Nominal Size Inches (W x H x D)	Std. Pkg. Qty.	Shipping Wt. Lbs. per Box (± 10%)
348-002-319	12 x 24	40	31.5
348-002-500	16 x 20	40	37.5
348-002-585	19 x 19	40	42.0
348-002-700	20 x 20	40	46.5
348-002-800	20 x 25	40	57.0
348-002-863	24 x 24	40	63.0
348-002-884	25¼ x 32¼	per order	per order

Note: 7"-85" wide media rolls and pads in lengths up to 65' 6" also available upon request. Contact your local AAF Flanders representative for more information.

HVAC

SureStop™ Media

Product Overview

- Designed specifically for paint booth operations
- Reduces downtime by protecting equipment and improving operating conditions
- Extends capital equipment life cycles by decreasing exposure to overspray solids
- Reduces fire hazards by removing airborne paint solids
- Designed specifically for paint booths with horizontal or downdraft airflow
- Removes paint overspray solids from all of the following:
 - Lacquers
 - Epoxies
 - Vinyls
 - Primers and Enamels (Air Dry Solvent and Baked Solvent)
 - Water-Based Emulsions (Acrylic or Latex)



Specifications

Filter Depth	1", 1 1/4"
Media Type	Expanded Paper, Paper/Synthetic
Special Size Available	No
Antimicrobial Available	No
Air Filtration Certification	UL 900

Product Information

Part Number	Nominal Size Inches (W x H x D)	Actual Size Inches (W x H x D)	Std. Pkg. Qty.	Shipping Wt. Lbs. per Box (± 10%)
P-SC (1" Thick, Paper, Standard Capacity) Pads				
370-111-500	16" x 20"	16 1/2" x 20 1/2"	70	13.0
370-111-600	16" x 25"	16 1/2" x 25 1/2"	70	16.0
370-111-700	20" x 20"	20 1/2" x 20 1/2"	70	14.0
370-111-800	20" x 25"	20 1/2" x 25 1/2"	70	18.0
P-SC (1" Thick, Paper, Standard Capacity) Rolls				
371-101-853	22" x 40'	22 1/2" x 40'	2	8.0
371-101-871	45" x 12'	45" x 12'	3	8.0
371-101-955	45" x 40'	45" x 40'	1	8.0
P-HC (1 3/8" Thick, Paper, High Capacity) Rolls				
370-115-700	20" x 20"	20 1/2" x 20 1/2"	30	12.0
370-115-800	20" x 25"	20 1/2" x 25 1/2"	30	14.0
P-SCS (1" Thick, Paper/Synthetic) Pads				
372-012-700	20" x 20"	20 1/2" x 20 1/2"	60	13.0
372-012-800	20" x 25"	20 1/2" x 25 1/2"	60	16.0
P-SCS (1" Thick, Paper/Synthetic) Rolls				
372-012-923	45" x 6'	45 1/2" x 6'	5	7.0
372-012-929	45" x 8'	45 1/2" x 8'	4	8.0
372-012-935	45" x 10'	45 1/2" x 10'	3	7.0
372-012-947	45" x 12'	45 1/2" x 12'	3	9.0
372-012-953	45" x 30'	45 1/2" x 30'	1	7.0
P-SCDS (1 1/4" Thick, Paper/Synthetic) Pads				
373-001-700	20" x 20"	20 1/2" x 20 1/2"	60	13.0
373-001-800	20" x 25"	20 1/2" x 25 1/2"	60	16.0
P-SCDS (1 1/4" Thick, Paper/Synthetic) Rolls				
373-001-923	45" x 6'	45" x 6'	5	10.0
373-001-929	45" x 8'	45" x 8'	4	10.0
373-001-003	45" x 9'	45" x 9'	3	10.0
373-001-935	45" x 10'	45" x 10'	3	10.0
373-001-947	45" x 12'	45" x 12'	3	12.0
373-001-953	45" x 30'	45" x 30'	1	10.0

Note: Paint Booth floor paper also available, contact your local AAF Flanders representative for details.