Introducing the Simple Touch Controller – your perfect solution for individual, group and zone control. This centralised remote offers power on/off functionality and convenient timer settings. With the ability to constantly monitor the status of all connected systems, it provides real-time alerts and notifications.

SIMPLE TOUCH
CONTROLLER

Office

Villa

Home

Product Highlight

- **Versatile Aesthetic**
  Sleek and minimalist design that seamlessly blends in with various interior style, from modern offices to upscale residences.

- **Intuitive Design**
  Easy to navigate and operate the controller.

- **Flexibility and Adaptability**
  Suitable for a wide range of application across different environments.

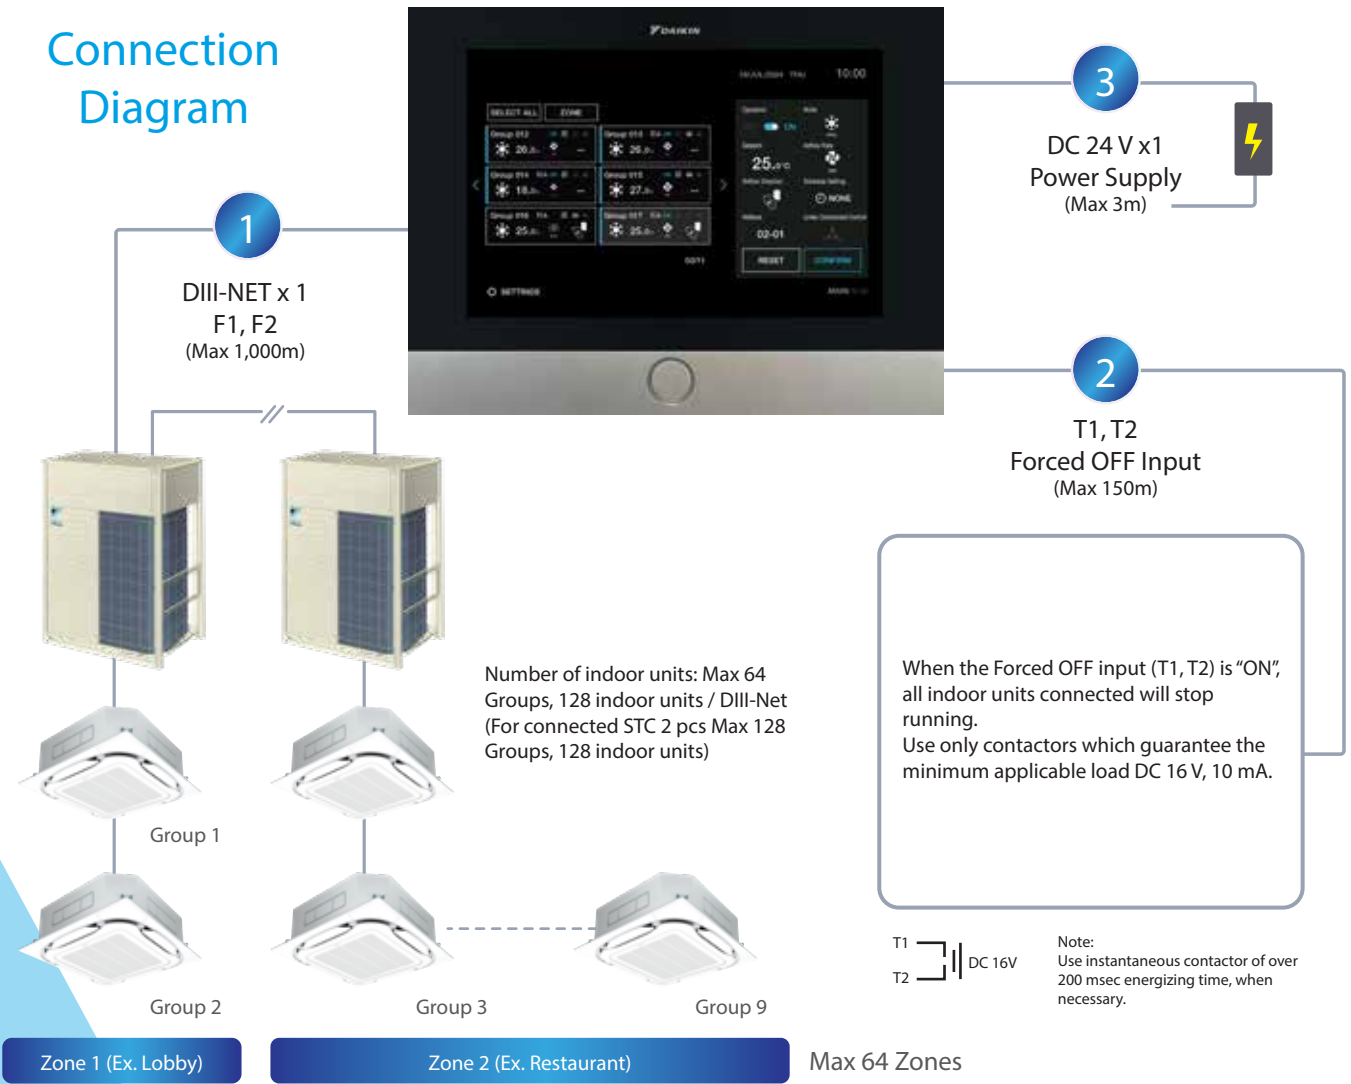## Key Features

Daikin Eye

All in One

Touch Screen

Interactive UI

Connection Diagram

1

DIII-NET x 1
F1, F2
(Max 1,000m)

3

DC 24 V x1
Power Supply
(Max 3m)

2

T1, T2
Forced OFF Input
(Max 150m)

Number of indoor units: Max 64
Groups, 128 indoor units / DIII-Net
(For connected STC 2 pcs Max 128
Groups, 128 indoor units)

When the Forced OFF input (T1, T2) is "ON",
all indoor units connected will stop
running.
Use only contactors which guarantee the
minimum applicable load DC 16 V, 10 mA.

Group 1

Group 2   Group 3   Group 9

T1
T2   DC 16V

Note:
Use instantaneous contactor of over
200 msec energizing time, when
necessary.

| Zone 1 (Ex. Lobby) | Zone 2 (Ex. Restaurant) | Max 64 Zones |

Simple Touch Controller DTP401A61

Display	LCD	Touch Screen 8 inch TFT
Power Supply	Input	DC 24 V ± 5% Adaptor Power Supply
	Rated Power Consumption	Max 5.5W
Operationg Conditions	Temperature	-10~50°C
	Humidity	Less Than 95% RH
External Input/Output	F1-F2 DIII-NET	1 Port / 128 Indoor Units/ 64 Groups
	T1-T2	1 Port / Force OFF
Workability	Installation Environment	Indoor Wall (Direct by Screw)
	Installation Direction	Horizontal Control

Features	
Number of Management Groups	DIII-Net x 1 Port 64 Groups / 128 Units
Control	On/Off
	Temperature Setting
	Mode Setting
	Remote Control Acceptance/ Rejection
	Air Flow Rate Setting
	Air Flow Direction Setting
	Weekly Schedule
Monitoring	On/Off Status
	Error
	Malfunction Code
	Filter Sign
	Fan Status
Other Controls	Daylight Saving Time
	Group Control
	Forced OFF by External

For any further enquiries, please contact your local sales office.
Specifications, designs and other content appearing in this catalogue are correct as of June 2024 and subject to change without notice.

DHOS-CS-PC-2401